



MVIPC-616 4-Slot VMEBus IndustryPack Carrier

Specifications

- **IndustryPack Slots** - 4
- **I/O Space** - A16 space, 128 bytes per IndustryPack slot
- **ID Space** - A16 space, 128 bytes per IndustryPack slot
- **Memory Space** - A24 space: none or 128 KB to 2 MB per IndustryPack slot. A32 space: 8 MB per IndustryPack slot fixed
- **Interrupts** - IndustryPack interrupts mapped 1:1 to VME IRQ levels by shunt or PLD selections.
- **Front Panel I/O Access** - One pair of 50-pin right-angled keyed, shrouded ribbon cable connectors with ejection hardware for each pair of IndustryPack slots
- **Back Panel I/O Access** - All 50 I/O pins from slot D and a configurable selection of 14 pins from slot C routed to VME bus P2 rows A and C
- **Indicators** - 1 green LED per slot to indicate accesses. 1 green LED to show power to slots A and B. 1 green LED to show power to slots C and D
- **IndustryPack Site Features** - 8 MHz only. IO cycles, ID cycles, memory cycles, interrupt acknowledge cycles. 32-bit interface and IndustryPack DMA are not supported.

VME Specifications

- Conforms with VME Specifications Revision C.1 IEEE Std. 1024/D2
- **Board size:** 6U

IndustryPack Specification


- ANSI/VITA-4 1995

Power Requirements

- +5V @ 500mA max
- +12V @ 10mA
- -12V @ 10mA

Environmental

- **Operating Temperature:** 0 to 70 °C
- **Storage Temperature:** -40 to 85 °C
- **Shock:** 25g, 11ms on all axis
- **Humidity:** 80% Rel. Humidity, non-condensing

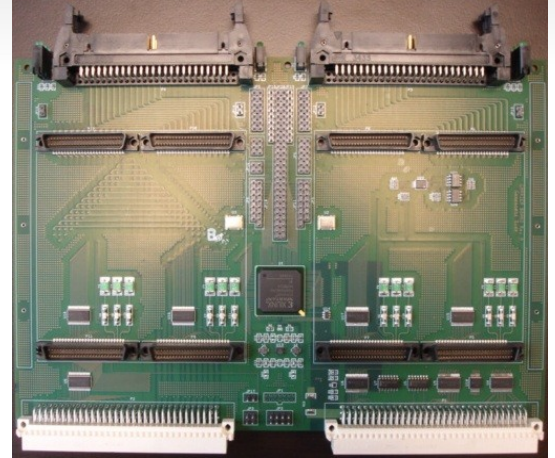

The MVIPC-616 4-Slot VME-IndustryPack Carrier card is a drop-in-replacement for the GE-IP SBS VIPC616 and VIPC618

Features

The MVIPC-616 provides mechanical mounting and the electrical interface from the VME backplane to 4, single-wide IndustryPacks or up to 2, double-wide IndustryPacks. The carrier supports I/O, ID, memory, and interrupt functions. It conforms to the IndustryPack Logic Interface Specification.

- **Conformal coating is standard on all units.**
- **Conduction-cooled version available**

As with all Merlin Embedded DIR products, the MVIPC-616 has the same, or better, functional performance than the product it is replacing. All Merlin Embedded products are backed by a 2-year warranty and 15 years of life-cycle support. The user will not have to take on any obsolescence issues when utilizing Merlin Embedded products.

Merlin Embedded
10415 Willow Ridge Loop
Orlando, FL 32825
(866) 700 7704
www.merlinembedded.com